

YOSEMITE



kingsstone

kstone@kingsholdings.com


www.kingsholdings.com

info@elementplus.com.hk

kingsstone

YOSEMITE

MATT•ANTISLIP

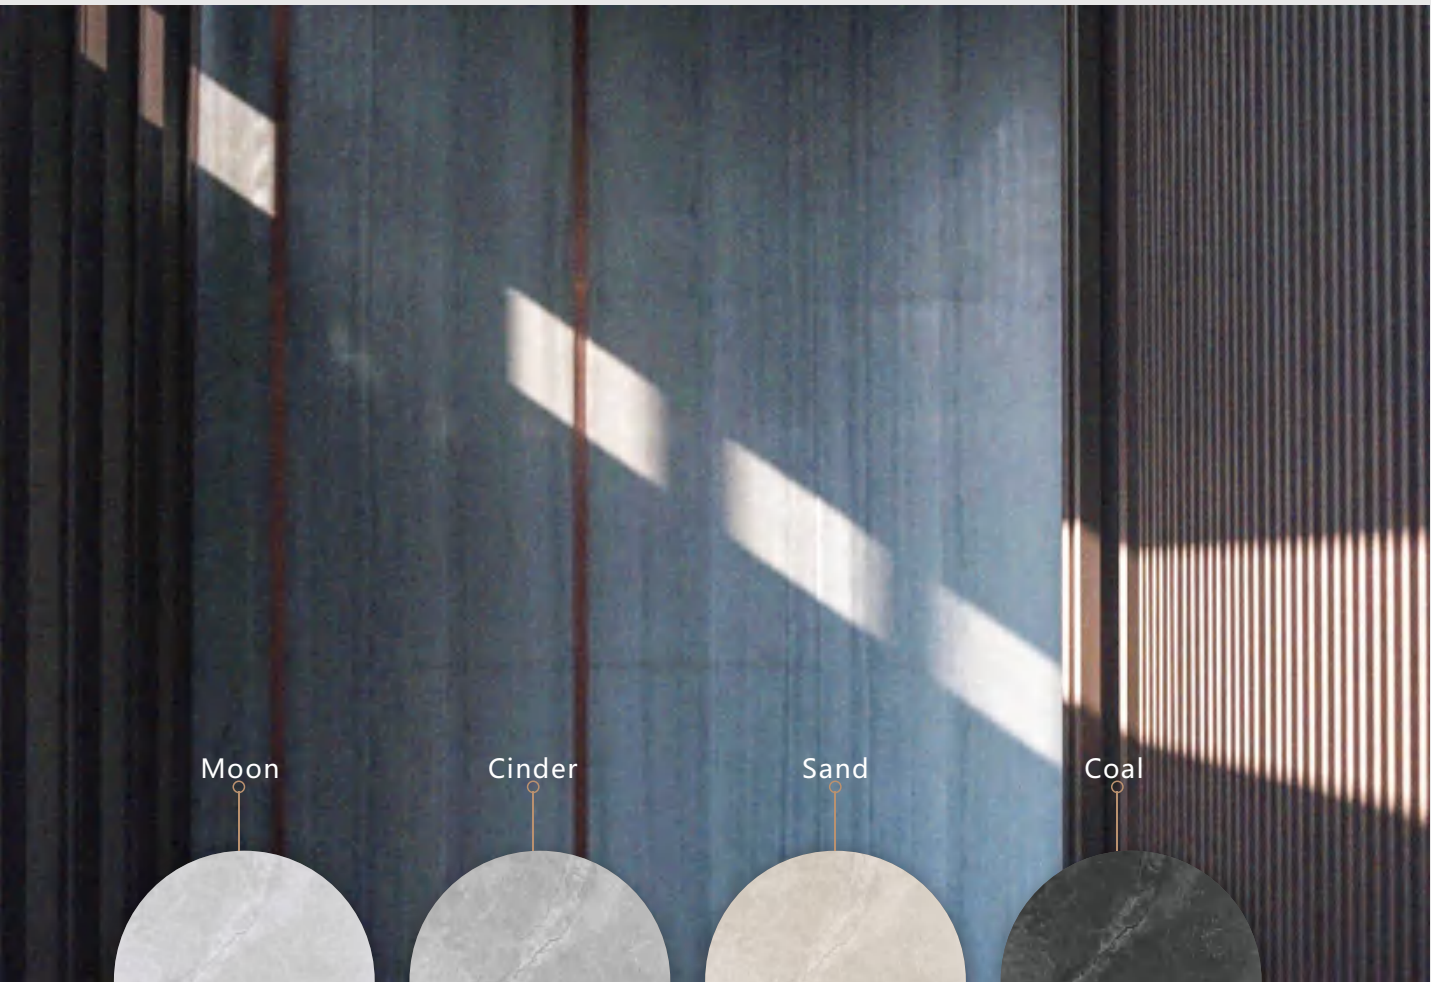


Moon

Cinder


Sand

Coal

—
SIZE:



60x60cm 24"x24"



60x120cm 24"x48"

THICKNESS

▼
10mm
▲

Yosemite is the new line of products made using Anti-slip glazed technology integrated into tile surfaces.

The Technology applied to the surfaces, combined with proper maintenance, helps to ensure the highest level of cleanliness ad hygiene, Anti-slip without altering the aesthetic quality



Application Space



Hotels



Public Spaces



Housing



Airports



Bar-restaurants



Malls



Shops



Train Stations

YOSEMITE



THICKNESS
10mm


Code: Moon
60x60cm 24"x24"
60x120cm 24"x48"



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"


YOSEMITE COLLECTION

MATT • ANTISLIP



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"

YOSEMITE

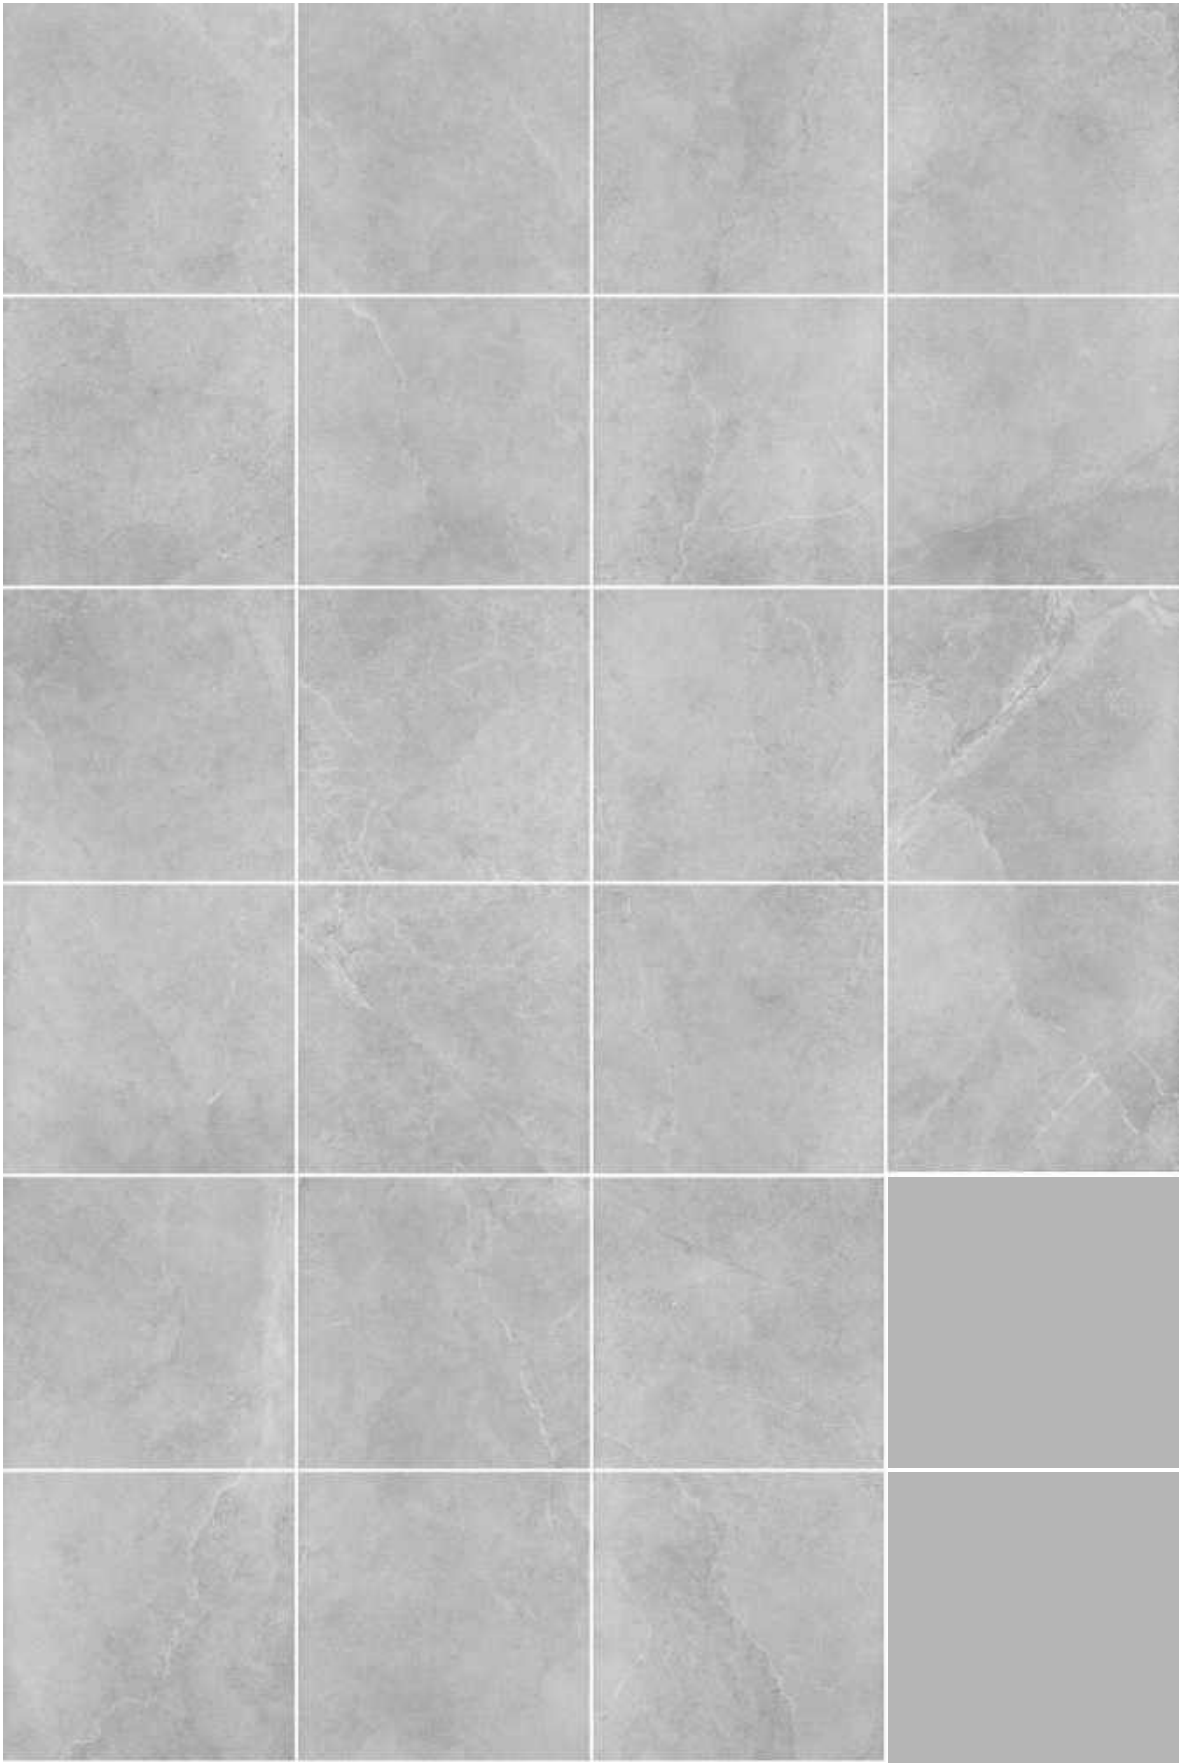

THICKNESS
10mm


Code:Cinder
60x60cm 24"x24"
60x120cm 24"x48"



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"

YOSEMITE COLLECTION

MATT • ANTISLIP



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"

YOSEMITE



THICKNESS
10mm

Code: Sand
60x60cm 24"x24"
60x120cm 24"x48"



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"


YOSEMITE COLLECTION

MATT • ANTISLIP



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"

YOSEMITE

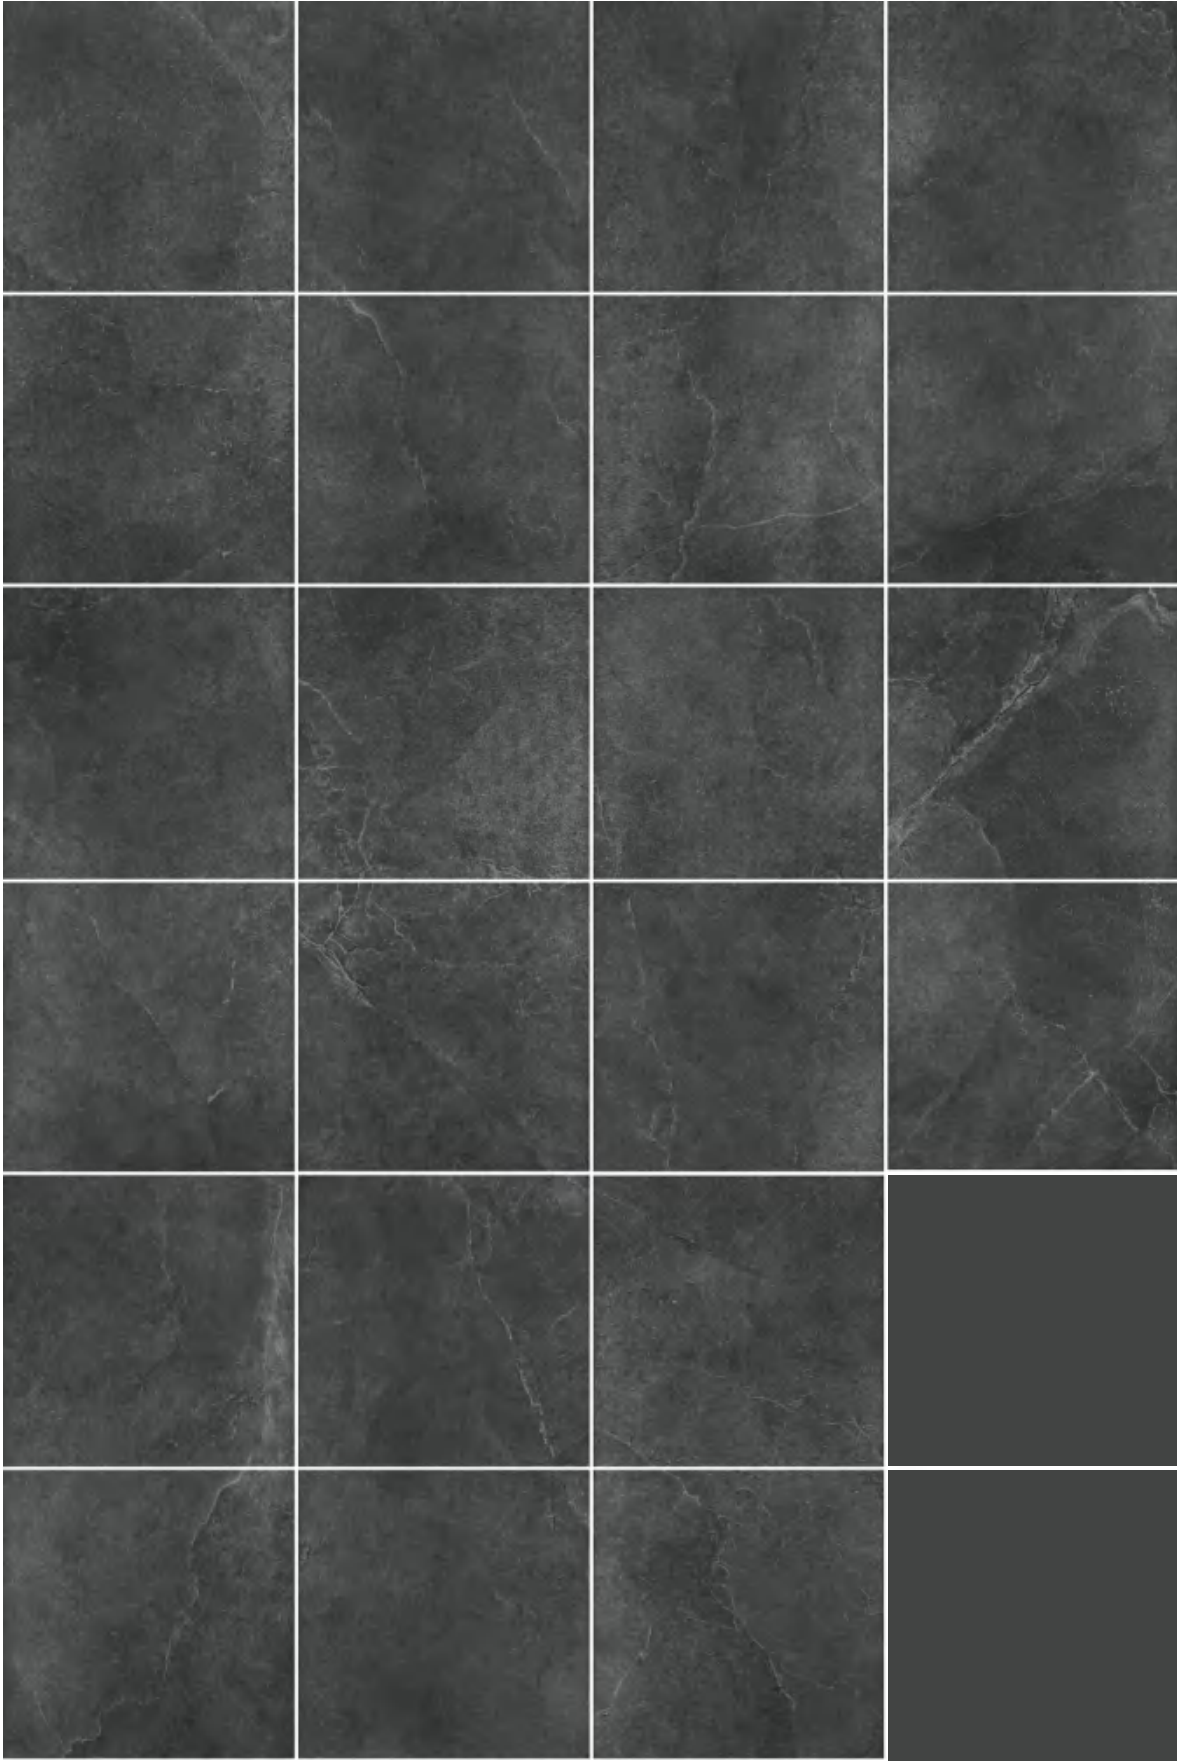

THICKNESS
10mm

Code:Coal
60x60cm 24"x24"
60x120cm 24"x48"



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"

YOSEMITE COLLECTION

MATT • ANTISLIP



Floor: 600x600mm 24"x24"
Floor: 600x1200mm 24"x48"

MOSAICS

Bianco



270x293mm
10. 8" x11. 72"



300x300mm
12" x12"



312x300mm
12. 48" x12"




260x315mm
10. 4" x12. 6"




306x269mm
12. 24" x10. 76"

Grigio




270x293mm
10. 8" x11. 72"



300x300mm
12" x12"



312x300mm
12. 48" x12"



260x315mm
10. 4" x12. 6"




306x269mm
12. 24" x10. 76"


Nero




270x293mm
10. 8" x11. 72"



300x300mm
12" x12"



312x300mm
12. 48" x12"




260x315mm
10. 4" x12. 6"




306x269mm
12. 24" x10. 76"


LAYING PATTERNS

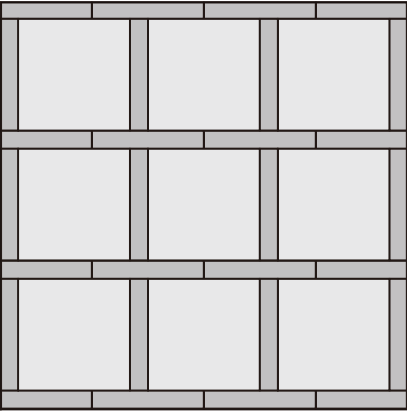

60X60 75%
10X60 25%

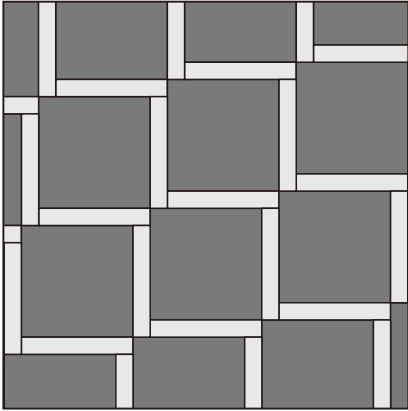

60X60 75%
10X60 25%

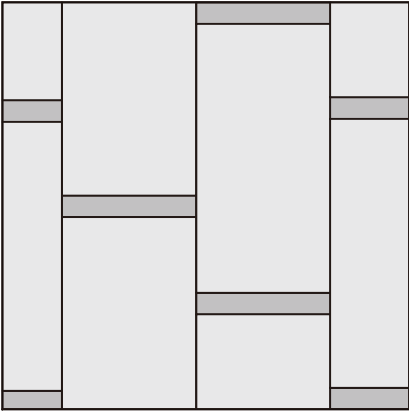

60X120 86%
10X60 14%

Technical Standard

TECHNICAL CHARACTERISTICS	STANDARD TEST METHOD	STANDARD PRESCRIBED VALUES	FIORE VALUES
MEASUREMENT AND SURFACE APPEARANCE			
LENGTH	EN ISO 10545-2	±0.6%	±0.1%
WIDTH	EN ISO 10545-2	±0.6%	±0.1%
THICKNESS	EN ISO 10545-2	±5%	±3%
TRANSMUTATION	EN ISO 10545-2	±0.5%	±0.2%
PHYSICAL PROPERTIES			
WATER ABSORPTION	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
BREAKING STRENGTH	EN ISO 10545-4	≥ 1300N	≥ 1300N
MODULUS OF RUPTURE	EN ISO 10545-4	≥ 35N/mm²	≥ 35N/mm²
RESISTANCE TO ABRASION	EN ISO 10545-6	≤ 205mm³	≤ 160mm³
THERMAL EXPANSION COEFFICIENT	EN ISO 10545-8	≤ 9MK-1	≤ 7MK-1
TEMPERATURE SHOCK RESISTANCE	EN ISO 10545-9	NO DEFECTS SHOULD BE VISIBLE	DURABLE
FROST RESISTANCE	EN ISO 10545-12	NO SURFACE DEFECTS OR CRACKS SHOULD BE VISIBLE	ANTI-ICE
SLIP RESISTANCE	DIN 51130	R9-R13	≥ R9
CHEMICAL PROPERTIES			
CHEMICAL RESISTANCE RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	EN ISO 10545-13	THERE SHOULD BE NO VISIBLE CHANGES WHEN SUBJECTED TO CHEMICALS	DURABLE
RESISTANCE TO STAINING	EN ISO 10545-14 When subjected to chemicals	THERE SHOULD BE NO VISIBLE CHANGES WHEN SUBJECTED TO CHEMICALS	NO VISIBLE DEFECTS

Packing Details

COLLECTION	Sizes 	Pcs/Ctn 	M²/Ctn 	kgs/Ctn 	Ctns/Plt 	M²/Plt 	Kg/Plt
YOSEMITE	60x120-24x48"	2	1.44	34.5	56	80.64	1932
	60x60-24x24"	4	1.44	32.5	40	57.6	1300
	30x60-12x24"	8	1.44	31.5	40	57.6	1260
	30x30-12x12"	11	0.99	22	54	53.46	1188
	30x30-12x12" Mosaic	11	0.99	22	54	53.46	1188

SHADE VARIATION	V3	Uniform appearance V1	Slight variation V2	Moderate variation V3	Substantial variation V4
-----------------	----	--------------------------	------------------------	--------------------------	-----------------------------